

THE HONORABLE COMMISSIONER  
OF PATENTS AND TRADEMARKS  
Washington, D.C. 20231

Attorney Docket No.: VX002115

Date: April 7, 2000

Dear Sir:

Transmitted herewith for filing is the **UTILITY** patent application of:

Inventor(s): Yashiyuki SHITAYA

Title: METHOD OF CONTROLLING COMMUNICATIONS AMONG ELECTRONIC DEVICES,  
CONSTRUCTION MACHINE USING THIS METHOD, AND ELECTRONIC CIRCUIT OF  
CONSTRUCTION MACHINE

- ☒ 25 pages of written description, claims and abstract.  
☒ SEVEN sheet(s) of formal drawings.  
☒ Executed Declaration and Power of Attorney  
☒ Assignment Papers (cover sheet and documents)  
☐ Certified Copy of Priority Documents  
☐ Information Disclosure Statement  
☐ Small Entity Statement(s)  
☒ Return Postcard Receipt  
☐ Preliminary Amendment

☐ Other: \_\_\_\_\_

☒ Filing Fee, calculated as shown below:

FOR:	(Col. 1) NO. FILED	(Col. 2) NO. EXTRA*
BASIC FEE		
TOTAL CLAIMS	3 - 20 =	0
INDEP. CLAIMS	3 - 3 =	0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

\* If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

SMALL ENTITY	
RATE	FEE
	\$ 345.00
x 9	\$
x 39	\$
+ 130	\$
TOTAL	\$

OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$ 690.00
x 18	\$
x 78	\$
+ 260	\$
TOTAL	\$ 690.00

- ☐ One check ☒ two checks in the amount of \$ 690.00 & 40.00 to cover the filing fee and  
☐ assignment recordation is (are) enclosed.

☒ The Commissioner is hereby authorized to charge and credit our Deposit Account No. 22-0256 as described below. A duplicate of this sheet is attached.

- ☐ Charge the amount of \$ \_\_\_\_\_ to cover the filing fee and ☐ assignment recordation.  
☒ Charge deficiencies in the enclosed fees or any additional filing fees required under 37 CFR 1.16.  
☐ Charge any patent application processing fees under 37 CFR 1.17.  
☐ Charge the issue fee set in 37 CFR 1.18 at the mailing to the Notice of Allowance pursuant to 37 CFR 1.311(b).  
☒ Credit any overpayment.

DIRECT ALL CORRESPONDENCE TO:

VARNDELL & VARNDELL, PLLC  
SUITE 220  
1150 S. WASHINGTON ST.  
ALEXANDRIA, VA 22314  
(703) 683-9730

Customer Number  
021369 →



021369

PATENT TRADEMARK OFFICE

Respectfully submitted,  
VARNDELL & VARNDELL, PLLC

R. Eugene Varndell, Jr.  
Registration No. 29,728

METHOD OF CONTROLLING COMMUNICATIONS AMONG ELECTRONIC  
DEVICES, CONSTRUCTION MACHINE USING THIS METHOD, AND  
ELECTRONIC CIRCUIT OF CONSTRUCTION MACHINE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a method of controlling communications among electronic devices in a system where electronic controls with different types of communication protocols coexist, a construction machine using this control method, and an electronic circuit of such a construction machine.

2. Description of the Related Art

Recently, the number of electronic devices mounted in construction machines is increasing, and a communication procedure (protocol) used among the electronic devices has come to be used in multiple numbers.

And, a conventional construction machine is separately provided with a communication line for each of the communication procedures (hereafter, it is called, "communication protocols") to deal with the plurality of communication protocols. Such a conventional construction machine is described in, for example, Japanese Patent Publication No. 8-28911.

Thus, the number of communication lines is increased and the system structure is complex because the communication lines are provided for the multiple

communication protocols respectively. And, when a new electronic device using another communication protocol is added, major modifications are required.

According to the above structure, the communication line having a different communication protocol is used to backup a communication failure of one of the communication lines.

But, a processing procedure to use the line of another communication protocol is complex, it is difficult to give redundancy, and safety is low.

As described above, the conventional device had the communication lines for the respective communication protocols, increasing the number of communication lines and having a complex system structure. And, addition of a new electronic device using another communication protocol had a disadvantage that major modifications were required.

In the conventional structure where another different communication protocol is used in order to backup a communication failure of one line, the processing procedure to use the line of another communication protocol is complex. As a result, there is a problem that it is difficult to give redundancy, and safety is low.

#### SUMMARY OF THE INVENTION

It is an object of the present invention to provide a method of controlling communication among electronic devices, which can construct a system without increasing the number of communication lines even if a plurality of

communication protocols coexist, flexibly deal with the expansion of the system, readily form a redundant structure for maintaining communications and readily realize high safety, a construction machine using the same and an electronic circuit for a construction machine.

To achieve the above object, the invention of claim 1 is a method of controlling communications among a plurality of electronic devices which communicate by using at least one of a plurality of different types of communication protocols, comprising the steps of: connecting the electronic devices through a multiplex transmission serial communication line which supports communications by a plurality of different frame formats; and allocating one of the frame formats to one type of the communication protocols to enable coexistence of communications among the electronic devices by the plurality of different types of communication protocols on the multiplex transmission serial communication line.

Thus, the structure of claim 1 enables to decrease the number of communication lines among the electronic devices using the plurality of different types of communication protocols and to simplify the system structure. Where a new electronic device using another communication protocol is to be added, the system can be expanded without requiring major modifications. Therefore, a very flexible system can be configured readily.

The invention of claim 2 is a construction machine having therein a plurality of communication-networked

electronic devices which communicate by using at least one of a plurality of different types of communication protocols, wherein: the electronic devices are connected through a multiplex transmission serial communication line which supports communications by a plurality of different frame formats; and an electronic circuit is provided, which allocates one of the frame formats to one type of the communication protocols to enable coexistence of communications among the electronic devices by the plurality of different types of communication protocols on the multiplex transmission serial communication line.

Thus, the structure of claim 2 enables to decrease the number of communication lines among the electronic control devices using the plurality of different types of communication protocols in the construction machine and to simplify the system structure. Where a new electronic control device using another communication protocol is to be added, the system can be expanded without requiring major modifications. Therefore, a very flexible system can be configured readily.

Particularly, the construction machine has a different type of electronic device mounted depending on a machine type, a machine grade and a destination, etc. and is required to be flexible for connection of equipment. Since the construction machine is required to offer high safety in view of the nature of the device, the aforesaid structure enables to achieve the system with high flexibility and safety.

DocId: 3244569

The invention of claim 3 is an electronic circuit in a construction machine having therein a plurality of communication-networked electronic devices which communicate by using at least one of a plurality of different types of communication protocols, wherein: the electronic devices are connected through a multiplex transmission serial communication line which supports communications by a plurality of different frame formats; and one of the frame formats is allocated to one type of the communication protocols to enable coexistence of communications among the electronic devices by the plurality of different types of communication protocols on the multiplex transmission serial communication line.

Thus, the structure of claim 3 enables to decrease the number of communication lines among the electronic control devices using the plurality of different types of communication protocols in the electronic circuit for the construction machine and to simplify the system structure. Where a new electronic control device using another communication protocol is to be added, the system can be expanded without requiring major modifications. Therefore, a very flexible system can be configured readily.

Particularly, the construction machine has a different type of electronic device mounted depending on a machine type, a machine grade and a destination and is required to be flexible for connection of equipment. Since the construction machine is required to offer high safety in view of the nature of the device, the adoption of this

electronic circuit enables to achieve the system with high flexibility and safety.

In the invention of claim 2 or 3, the electronic device comprises data generation means which generates a transmission frame by converting into a frame format allocated in correspondence with the communication protocol when the electronic device sends data of communication protocol used by itself, data transmission means which monitors a state of sending data on the multiplex transmission serial communication line and, when data has not been sent, sends the frame data to the multiplex transmission serial communication line, and data reception means which recognizes compatibility with the communication protocol of the own device in view of a data length of a header portion of the frame data on the multiplex transmission serial communication line.

In the invention of claim 2 or 3, at least two lines of first and second lines formed of the aforesaid multiplex transmission serial communication line are disposed in a redundant form, the first line is used for normal communications among the electronic devices, and if the first line fails, the communications among the electronic devices are maintained by switching to the second line. Thus, in case of a line failure, communications among the electronic devices can be maintained by switching the communications to the line as the standby system, thereby enabling to form a redundant structure and to secure high safety,

And, in the invention of claim 2 or 3, at least two lines of first and second lines formed of the aforesaid multiplex transmission serial communication line are disposed in a redundant form, the electronic devices are given priority depending on importance of data processed by the own device, all the electronic device are connected to the first line without depending on the priority, and the electronic device having priority higher than a predetermined level to the second line. And, the communications among the electronic devices are always performed by means of the first line and the second line, and if the second line has a failure, the communications are maintained by switching to the first line. Thus, while normally communicating with the traffic on the line lowered, if a failure occurs on the line having higher importance, communications using the line having lower importance are made possible, thereby enabling to enhance redundancy.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing the general structure of an electronic control circuit of a construction machine according to one embodiment of the invention;

Figs. 2(a) and 2(b) are diagrams showing structures of a plurality of frame formats supported by a multiplex transmission serial communication line shown in Fig. 1;

Fig. 3 is a diagram showing the structure of an electronic control device for enabling communications by a plurality of communications protocols on a multiplex



transmission serial communication line by using a plurality of frame formats;

Fig. 4 is a diagram showing a structure having a multiplex transmission serial communication line different from the above communication line so to have a backup function in case of a failure of the multiplex transmission serial communication line shown in Fig. 1;

Fig. 5 is a diagram showing a structure of an electronic control device by which a line switching operation is enabled;

Figs. 6(a) and 6(b) are diagrams showing specific structures of frame formats supported on the multiplex transmission serial communication line shown in Fig. 1 and Fig. 4;

Fig. 7 is a diagram showing one example of a format structure when a frame of protocol A is transmitted by using format STD shown in Fig. 6;

Figs. 8(a) to 8(e) are diagrams showing one example of a format structure when a frame of protocol A is transmitted by using format STD shown in Fig. 6; and

Fig. 9 is a diagram showing one example of a format structure when a frame of protocol B is transmitted by using format EXT shown in Fig. 6.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

New, one embodiment according to the present invention will be described in detail with reference to the attached drawings.

Fig. 1 is a diagram showing a general structure of an electronic control circuit for the construction machine according to one embodiment of the present invention. The construction machine shown here has a structure in that a plurality of electronic control devices for communications by using at least one of a plurality of different types of communication protocols are networked for communications. In this embodiment, the structure shown is of a hydraulic construction machine.

As shown in Fig. 1, this hydraulic construction machine has engine A as a drive source, hydraulic pump B driven by the engine, operation valve C and working machine cylinder D.

This hydraulic construction machine has therein a plurality of communication-networked electronic control devices for communicating by using at least one of a plurality of different types of communication protocols (A, B).

In this embodiment, the above electronic control devices include E/G (engine) monitoring device 1, E/G (engine) control device 2, T/M (transmission) control device 3, working machine control device 4, position measuring device 5, operation management device 6, input device 7, display device 8 and multiplex transmission serial communication line 9.

Here, the E/G (engine) monitoring device 1 is a device for monitoring and storing an operation condition of the engine according to sensor signals of a cooling water

temperature, a cooling water amount, an oil temperature, an oil amount, a fuel amount, an exhaust temperature and the like of the engine, failure information of an engine control device and others. In this case, communication protocol A is used to communicate.

The E/G (engine) control device 2 is a device for controlling to a predetermined engine speed by changing a fuel injection amount of the engine according to a level of depressing an unshown accelerator pedal. In this case, communication protocols A and B are used to communicate.

The T/M (transmission) control device 3 is a device for controlling gears of a transmission according to a signal from an unshown shift lever. In this case, communication protocol B is used to communicate.

The working machine control device 4 is a device for controlling a working machine cylinder by varying an opening of the operation valve according to an operation signal from an operation lever. In this case, communication protocol B is used to communicate.

The position measuring device 5 is a device for measuring the present position of the vehicle according to GPS (Global Positioning System). In this case, communication protocol B is used to communicate.

The operation management device 6 is a device for monitoring and recording the operating conditions of the vehicle body and respective control devices obtained through the sensor signals and communication lines. For example, they are record of failure occurrence history, record of

sensor signals at failures, record of maintenance history and others. In this case, communication protocols A and B are used to communicate.

The input device 7 is a device for entering control modes to the respective control devices. In this case, communication protocol B is used to communicate.

The display device 8 is a device for displaying control modes, sensor signals and failure information of the respective control devices. In this case, communication protocol B is used to communicate.

The multiplex transmission serial communication line 9 is connected with the aforesaid electronic control devices (the E/G (engine) monitoring device 1, the E/G (engine) control device 2, the T/M (transmission) control device 3, the working machine control device 4, the position measuring device 5, the operation management device 6, the input device 7 and the display device 8) and serves as a transmission path for transmitting and receiving data such as a request for processing performed among these electronic control devices, control modes shared among the networked electronic control devices, sensor signals, failure information and the like. And, this multiplex transmission serial communication line 9 is a protocol line for supporting communications by a plurality of different frame formats.

The present invention configures a network capable of two-way communications in one to  $n$  ( $n$  is 2 or more) among the electronic control devices on the multiplex transmission

serial communication line 9 according to a plurality of different types of communication protocols by allocating any one of the above plurality of different frame formats to one type of the communication protocol (A or B in this case) used by the respective electronic control devices.

Here, as a specific frame structure of the protocols (A, B) which can coexist on the multiplex transmission serial communication line 9, for example, the frame of protocol A comprises frame source address [Source Add.], frame destination address [Destination Add.], number by which processing desired to be executed by a processing requested side is shown [Procedure No.], [Sequence No.] which is managed by the processing requestor, incremented whenever transmission is made and used to specify whether a response is to the frame of the pertinent Procedure No. in a series of transmitting and receiving procedures and an argument [Argument (0 - 255 bytes) to the processing designated in Procedure No.

The frame of the protocol B comprises number [Parameter No.] indicating a type of parameter, source address [Source Add.], and data [Parameters (0 - 8 bytes)] specified by the above number. And, the control device having data with contents specified by the above Parameter No. transmits data in a broadcast without designating a destination at a given time interval.

In this embodiment, network control such as collision control and busy control of transmission data on the multiplex transmission serial communication line 9 is

performed as described below. First, bus access, collision detection and mediation will be described. Each of the electronic control devices starts to transmit upon detecting that the line is available. The electronic control device monitors the signal level of the communication line while transmitting. L level takes precedence over H level, and when there are two control devices outputting L level and H level respectively, the line has L level. When the line is L while the electronic control device outputs H, it loses its priority and stops transmitting. When the line is H while the electronic control device outputs L, it judges as a bit error and stops transmitting.

Now, busy control will be described. In this embodiment, when protocol is A, No. indicating BUSY is allocated to Procedure No., and if a processing node having received a processing request cannot process, BUSY is returned instead of Acknowledge. Protocol B is not provided with busy control.

Fig. 2 is a diagram showing structures of a plurality of frame formats supported by the multiplex transmission serial communication line 9 shown in Fig. 1. This embodiment shows one example of structures of two frame formats. And, for example, the communication protocol A is allocated the frame format shown in Fig. 2(a) while the communication protocol B is allocated the frame format shown in Fig. 2(b), so that communications can be made by a plurality of communication protocols on the multiplex transmission serial communication line 9 shown in Fig. 1.

In this case, headers have a different bit length falling in a relation of  $N < M$ , indicating that the format B has a longer header length. And, the present invention distinguishes the protocol types according to a difference in header length as will be described afterward. Data portions (DATA and EOF) other than the header section have a length (bit length) common (L bit) among the respective formats.

In this embodiment, only two are shown as the frame format supported on the multiplex transmission serial communication line 9 but it is not limitative, and another frame format may be used according to a type of communication protocol.

Fig. 3 is a diagram showing a structure of the electronic control devices (1 - 8) for enabling communications by a plurality of communication protocols on the multiplex transmission serial communication line 9 by using the above plurality of frame formats.

As shown in Fig. 3, each of the electronic control devices (1 - 8) has control section 100 for controlling the entire device, data conversion section 101 which produces a transmission frame by converting frame data according to the communication protocol (A or B) used by the own device into a frame format allocated to the communication protocol, data sending section 102 which monitors a state of sending data on the multiplex transmission serial communication line 9 and sends the converted frame data to the multiplex transmission serial communication line when the data has not

been transmitted, and data reception section 103 which recognizes adaptability with the communication protocol of the own device according to a data length of the header section of the frame data on the multiplex transmission serial communication line 9 and receives the frame data when it is judged adaptable.

In this structure, data of the communication protocol (A or B) used by the own device is transmitted by the data conversion section 101, and data converted into the frame format supported on the multiplex transmission serial communication line 9 is restored so to be processed by the control section 100 by using the data reception section 103.

According to the above structure, any one of a plurality of different frame formats supported on the multiplex transmission serial communication line is allocated to one type of the communication protocols used by the respective electronic control devices, and the type of the communication protocol is judged according to a data length (header section length) of the frame format. Accordingly, communications between the electronic control devices by a plurality of different types of communication protocols on a single multiplex transmission serial communication line can be made to coexist. And, the number of communication lines among the electronic control devices using a plurality of different types of communication protocols can be decreased to simplify the system structure. And, the system can be expanded without making major modifications to add a new electronic control device using



another communication protocol. Therefore, a system with a high flexibility can be easily constructed.

Now, a backup function used in case of a failure of the multiplex transmission serial communication line 9 will be described.

Fig. 4 is a diagram showing a general structure of an electronic control circuit for the construction machine according to another embodiment, wherein multiplex transmission serial communication line 9' is disposed independent of the aforesaid communication line 9 as a backup mechanism in case of a failure of the multiplex transmission serial communication line 9 shown in Fig. 1. This case also has a structure with automatic operation control device 10 newly disposed. Here, the automatic operation control device 10 is a device for automatic operation of the vehicle by sending the control signal to the respective control devices of the engine, the transmission and the working machine based on the signal of the position measuring device according to a predetermined course.

And, the multiplex transmission serial communication line 9 and the serial communication line 9' of this embodiment are selectively used according to the priority of contents of data to be transmitted. Specifically, the multiplex transmission serial communication line 9' (line with high importance) is used to transmit control information required for automatic operation with the automatic operation determined to be of high importance, and

the multiplex transmission serial communication line 9 (line with low importance) is used with other data determined to be of low importance.

In order to maintain communications of the control information required for the automatic operation, the electronic control devices (E/G control device 2, T/M control device 3, automatic operation control device 10) which transmit and receive control information required for the automatic operation are also connected to the multiplex transmission serial communication line 9 (line with low importance).

Where a failure occurs on the multiplex transmission serial communication line 9' to be the line with high importance, the E/G control device 2, the T/M control device 3 and the automatic operation control device 10 maintain communications by switching the line used for communications to the multiplex transmission serial communication line 9 (line with low importance).

Thus, two lines are provided according to the importance of the contents of transmission data to maintain communications with a communication traffic lowered, and if a trouble occurs in the line with high importance, communications using the line with low importance can be made. Therefore, communications of data with high importance can be secured, and redundancy is improved. It can also be used as a backup for another communication line by configuring as described above.

It is also possible to use the line with high

importance as a backup for the line with low importance.

Fig. 5, is a diagram showing a structure of the electronic control device for enabling the aforesaid line switching operation.

As shown in Fig. 5, the electronic control device comprises control section 100 for controlling the whole device, line failure monitoring section 201 for monitoring a state of failure of the line being used, and line switching section 202 for switching communications to another normal line by means of line switching switch 203 when a failure is detected.

Here, one embodiment of a switching operation by using another line as backup will be described.

For example, when the aforesaid communication protocol A is used, the electronic control device monitors whether a positive response (Acknowledge frame) is received or not after the line monitoring section 201 sends a processing request, and judges that the processing request has failed if no positive response (Acknowledge frame) is received from a destination within a predetermined period. And, if the failure occurs a predetermined number of times continuously to a plurality of destinations, a line change instruction is sent to the line switching section 202, which then switches the line by means of the line switching switch 203.

When the positive response is received, predetermined protocol data is formed by the data reception section shown in Fig. 3, and predetermined processing is conducted by the control section 100.

For example, when the communication protocol B is used, analysis is made by the data reception section 103 shown in Fig. 3 to store data. Therefore, when all data to be updated in a predetermined period is not updated, a line switching request is sent to the sender by some method (e.g., using the protocol A).

In the above embodiment, both the communication lines are used at the same time, and when one of the communication lines has a failure, the other communication line is used to continue communications to keep redundancy. But, the invention is not limited to it but may be configured as shown in Fig. 5 so that the respective electronic control device (1 to 10) are connected to both the multiplex transmission serial communication line 9 and the multiplex transmission serial communication line 9', the multiplex transmission serial communication line 9 is generally used, and when a failure occurs on the communication line 9, switching to the multiplex transmission serial communication line 9' is performed to keep communications among the respective electronic control devices (1 to 10).

Lastly, a specific example of the frame format shown in Fig. 2 will be described.

Fig. 6 is a diagram showing a specific structure of a frame format supported on the multiplex transmission serial communication lines 9 and 9' shown in Fig. 1 and Fig. 4, Fig. 6(a) showing a structure of format STD and Fig. 6(b) showing a structure of format EXT. It is seen from Fig. 6 that ID portions have a different length depending on types

of formats.

And, Fig. 7 and Fig. 8 show an example of the structure of a format to transmit the frame of protocol A by using the format STD shown in Fig. 6. As shown in Fig. 7, a plurality of frames, namely (1) start frame, (2) intermediate frame and (3) end frame, are prepared to transmit by using the above format STD. And, for example, to send the frame of protocol A shown in Fig. 8(a) in the format STD, it is divided into the start frame shown in Fig. 8(b), the intermediate frames shown in Fig. 8(c) and (d) and the end frame shown in fig. 8(e) and transmitted sequentially from the top one.

Fig. 9 is a diagram showing one example of the structure of a format when the frame of protocol B is transmitted by using the format EXT shown in Fig. 6.

And, when the individual electronic control devices using the formats A, B configured as described above use the protocol A, the data conversion section 101 shown in Fig. 3 divides the frame of protocol A into a plurality of frames (start frame, intermediate frame and end frame) using the format STD to produce the transmission frame to transmit the protocol A. Then, the data transmission section 102 transmits the divided plurality of frames in order of the start frame, the intermediate frame, and the end frame. And, to receive the protocol A, the data reception section 103 shown in Fig. 3 reconfigures the frame of protocol A from the format STD frame divided into the plurality of frames by the electronic control device of the destination

as described above, analyzes upon completion of the frame and makes predetermined processing.

On the other hand, when the protocol B is used, the data conversion section 101 shown in Fig. 3 reconfigures the frame of protocol B into format EXT to transmit in order to transmit the protocol B. To receive the protocol B, the data reception section 103 shown in Fig. 3 analyzes the contents of the frame of format EXT reconfigured by the electronic control device of the destination as the frame of protocol B as described above and makes storing processing of data.

To coexist different protocols on the aforesaid multiplex transmission serial communication line, it is desirable to use a communication method by which the transmission interval of one of protocols is sufficiently long and a large influence is not applied to the transmission interval of the other protocol.

In this embodiment, the multiplex transmission serial communication line is achieved by wiring but may be achieved by wireless by means of radio waves, infrared rays or the like. In the aforesaid embodiment, the portion indicating a difference of format is positioned as the header at the top of the frames so that a difference in frame format can be recognized without receiving the whole frames by the receiver. But, the portion indicating the difference of frame format may be positioned at any portion of the frame. For example, it may be placed at the rear end of the frame as a footer. And, after receiving the whole frames, the

frame format may be analyzed and judged.

WHAT IS CLAIMED IS:

1. A method of controlling communications among a plurality of electronic devices which communicate by using at least one of a plurality of different types of communication protocols, comprising the steps of:

connecting the electronic devices through a multiplex transmission serial communication line which supports communications by a plurality of different frame formats; and

allocating one of the frame formats to one type of the communication protocols to enable coexistence of communications among the electronic devices by the plurality of different types of communication protocols on the multiplex transmission serial communication line.

2. A construction machine having therein a plurality of communication-networked electronic devices which communicate by using at least one of a plurality of different types of communication protocols, wherein:

the electronic devices are connected through a multiplex transmission serial communication line which supports communications by a plurality of different frame formats; and

an electronic circuit is provided, which allocates one of the frame formats to one type of the communication protocols to enable coexistence of communications among the electronic devices by the plurality of different types of communication protocols on the multiplex transmission serial



communication line.


3. An electronic circuit in a construction machine having therein a plurality of communication-networked electronic devices which communicate by using at least one of a plurality of different types of communication protocols, wherein:

the electronic devices are connected through a multiplex transmission serial communication line which supports communications by a plurality of different frame formats; and




one of the frame formats is allocated to one type of the communication protocols to enable coexistence of communications among the electronic devices by the plurality of different types of communication protocols on the multiplex transmission serial communication line.

## ABSTRACT OF THE DISCLOSURE


A plurality of electronic control devices for carrying out communications by using at least one of a plurality of different types of communication protocols are connected by a multiplex transmission serial communication line which supports communications by a plurality of different frame formats, and one of frame formats is allocated to one type of the communication protocols.

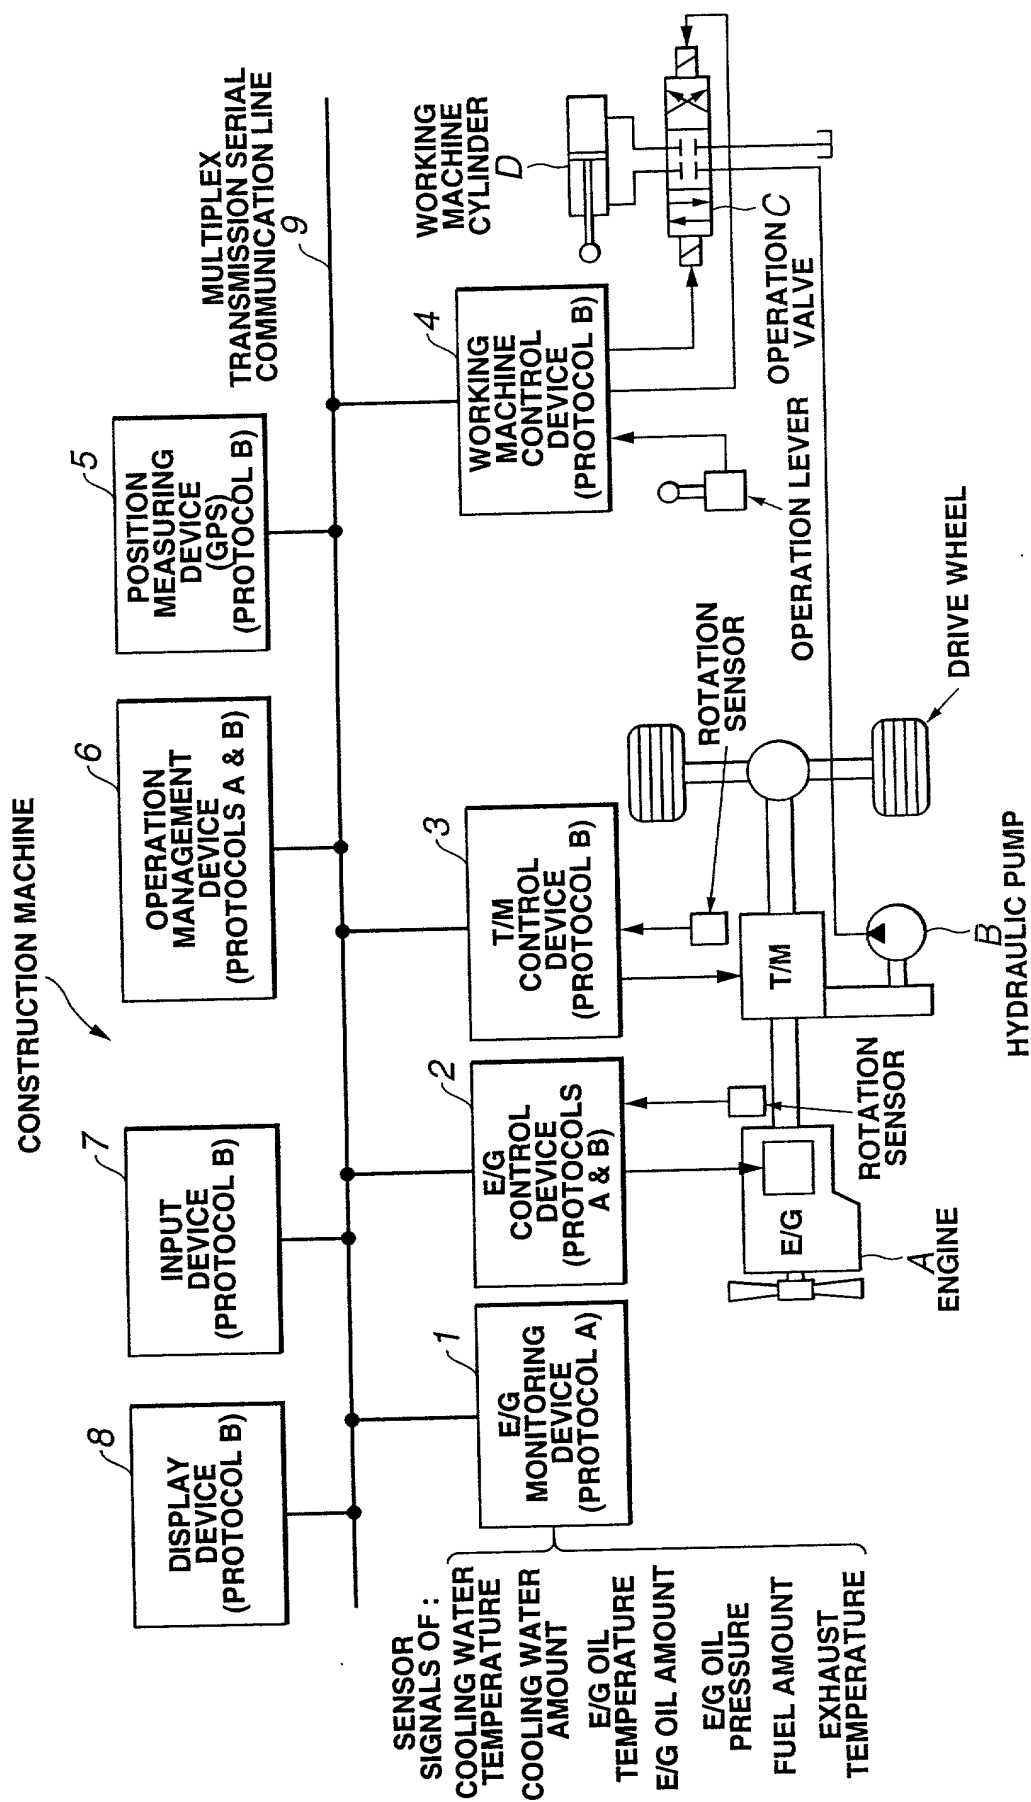


**FIG. 1**

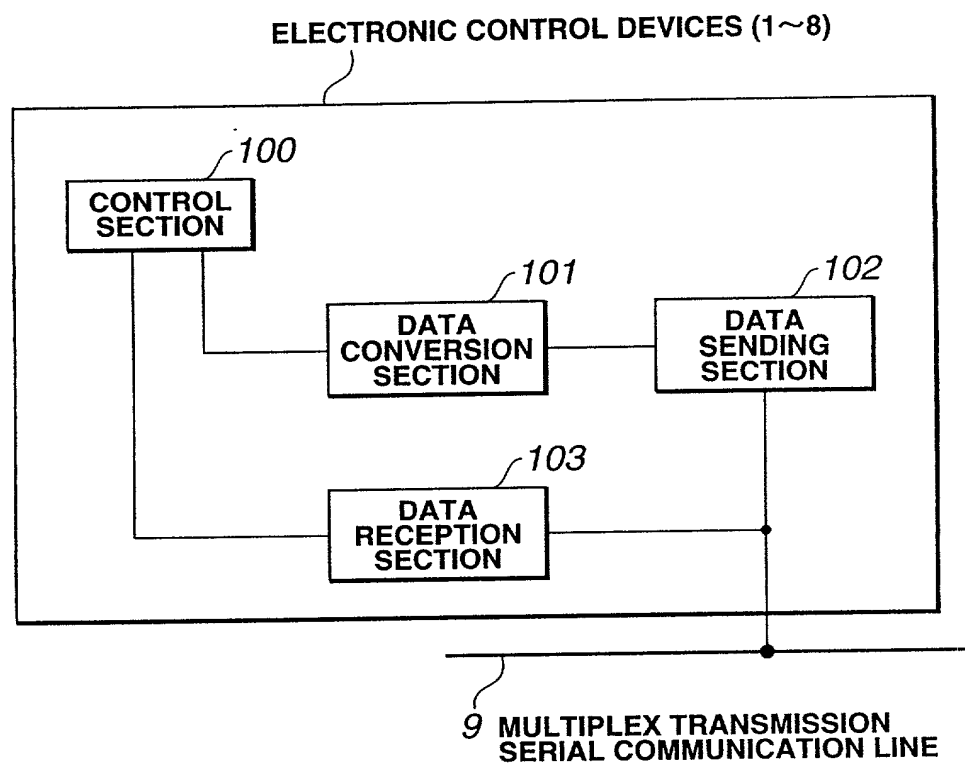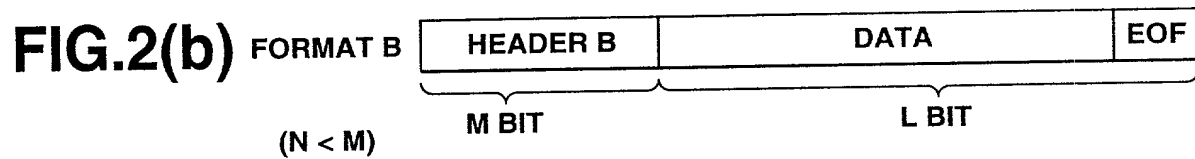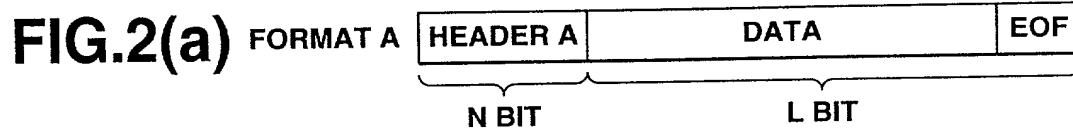

**FIG.3**

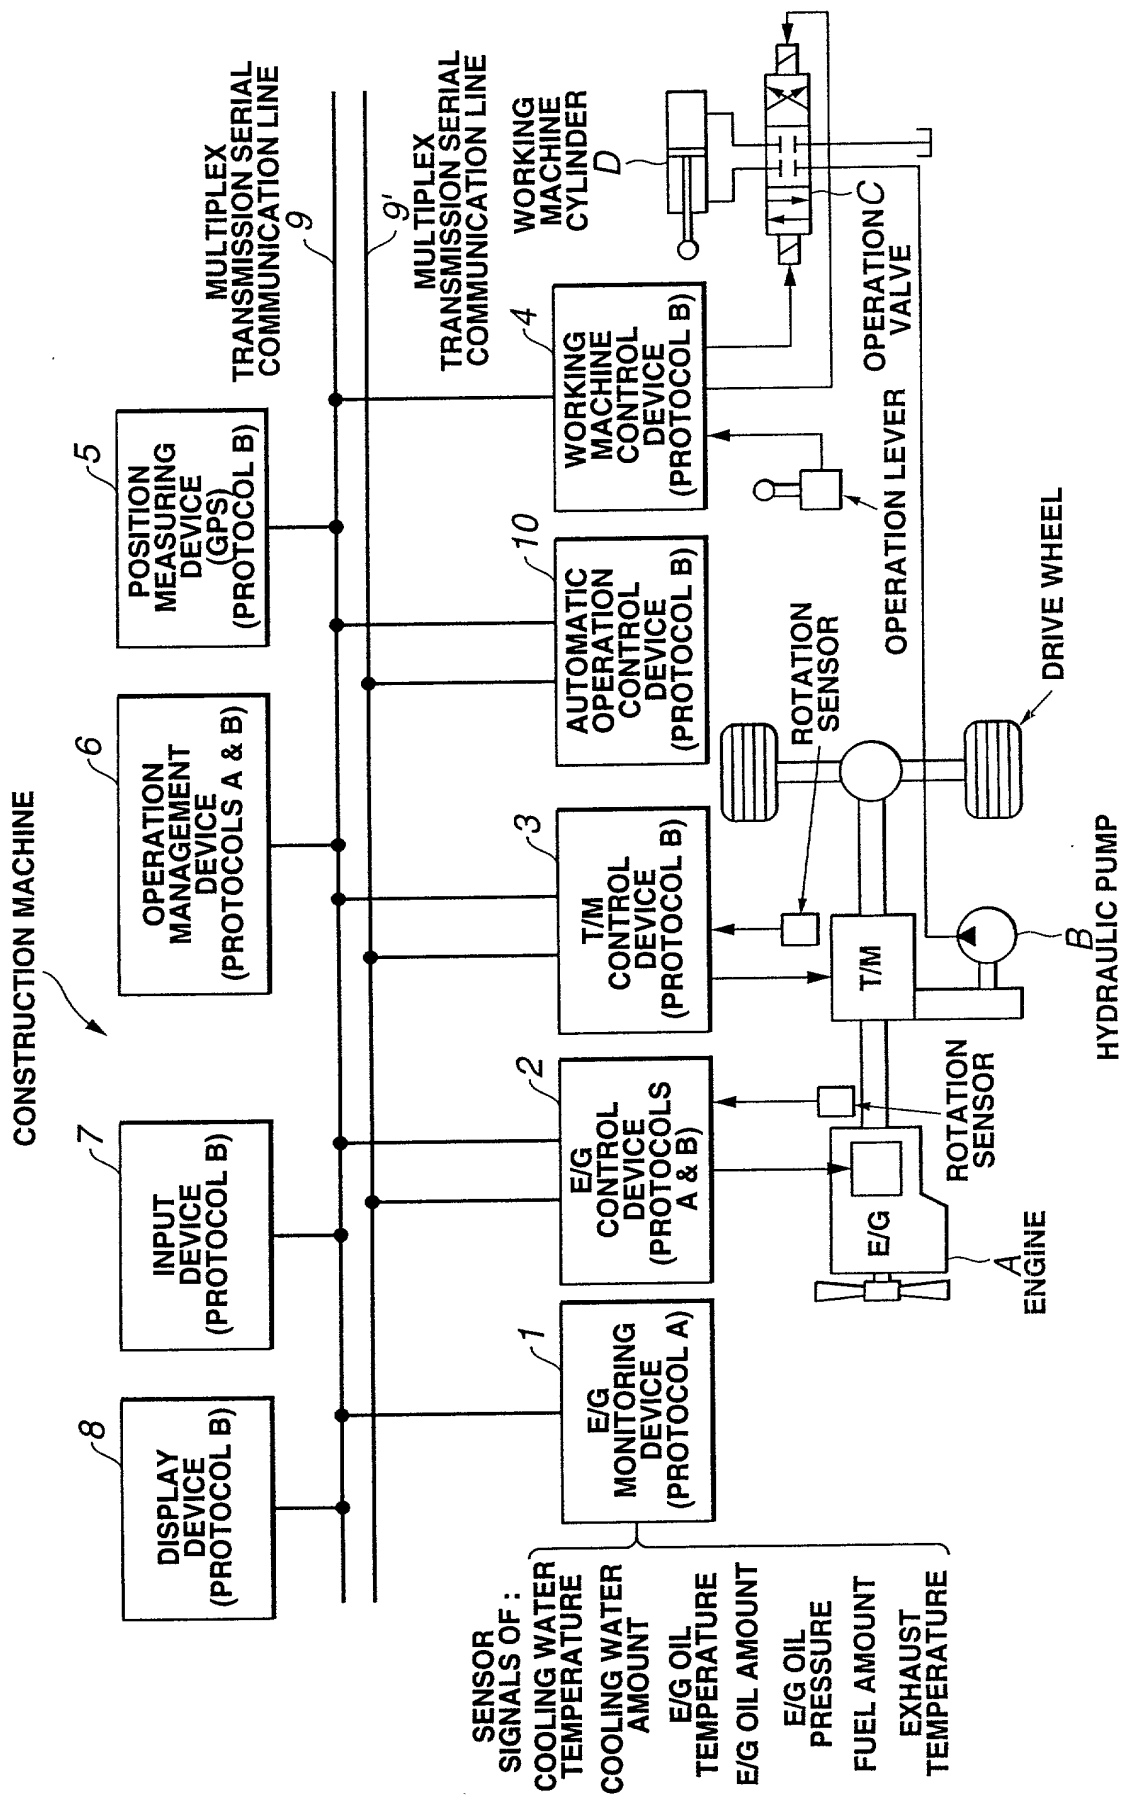
[illegible]

# FIG. 4

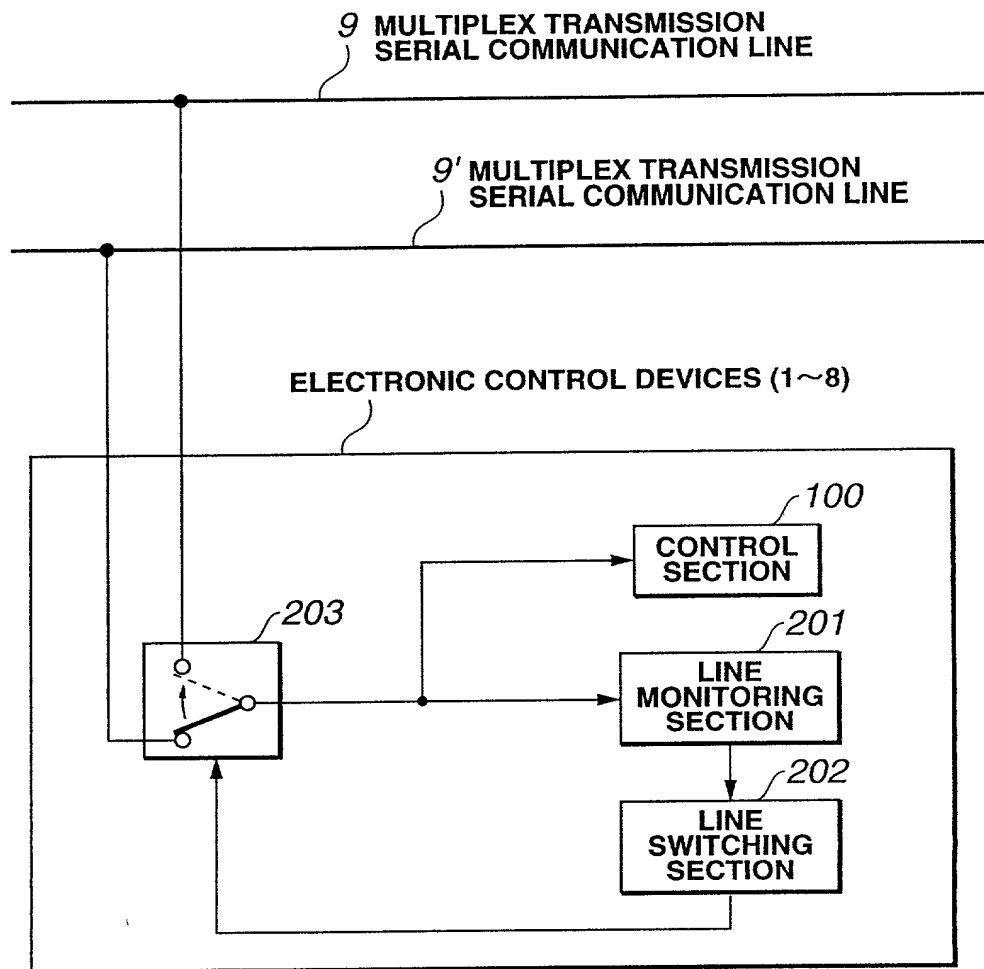


**FIG.5**

**< FORMAT STD >**



**< FORMAT EXT >**



**SOF : START OF FRAME**

**IDE : ID EXTENSION BIT**


**DLC : DATA LENGTH CODE**

**CRC : CYCLICAL REDUNDANCY CODE**


**EOF : END OF FRAME**

**IDE [0] : FORMAT STD, IDE [1] : FORMAT EXT**

1) START FRAME



2) INTERMEDIATE FRAME



3) END FRAME



DA : DESTINATION ADDRESS

SA : SENDER ADDRESS






XID : TRANSFER ID (START AND END FRAMES HAVE THE SAME NUMBER,  
AND INCREMENTED EVERY TIME THE SENDER TRANSMITS)

LEN : NUMBER OF DATA BYTES

CRC : DATA CRC

FIG.7



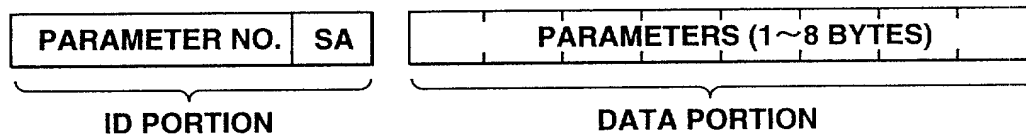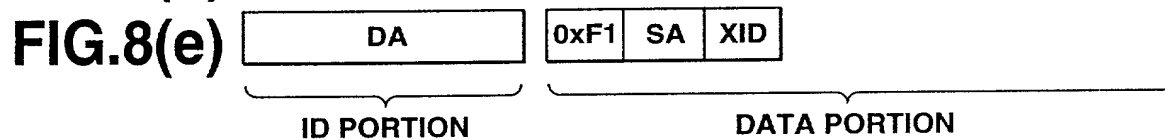

**FIG.9**

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

以下の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD OF CONTROLLING COMMUNICATIONS  
AMONG ELECTRONIC DEVICES, CONSTRUCTION  
MACHINE USING THIS METHOD, AND ELECTRONIC  
CIRCUIT OF CONSTRUCTION MACHINE

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約  
国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。

☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願

102853/ 1999

(Number)

(番号)

80688/ 2000

(Number)

(番号)

Japan

(Country)

(国名)

Japan

(Country)

(国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

### Priority Not Claimed

優先権主張なし

9/ April/ 1999

(Day/Month/Year Filed)

22/ March/ 2000

(Day/Month/Year Filed)

(出願年月日)

☐

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**Japanese Language Declaration**  
(日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (*list name and registration number*)

R. Eugene Varndell, Jr., Reg. No. 29,728.

書類送付先

Send Correspondence to:

VARNDELL & VARNDELL, PLLC  
Suite 220  
1150 South Washington Street  
Alexandria, VA 22314

直接電話連絡先： (名前及び電話番号)

Direct Telephone Calls to: (*name and telephone number*)

R. Eugene Varndell, Jr.  
(703) 683-9730

唯一または第一発明者名	Full name of sole or first inventor		
	Yoshiyuki SHITAYA		
発明者の署名	日付	Inventor's signature	Date
		<i>Yoshiyuki Shitaya</i>	March 29, 2000
住所	Residence		
	Isehara-shi, Kanagawa, Japan		
国籍	Citizenship		
	Japanese		
私書箱	Post Office Address		
	c/o Kenkyusho of Komatsu Ltd., 1200, Manda,		
	Hiratsuka-shi, Kanagawa 254-0913 Japan		
第二共同発明者	Full name of second joint inventor, if any		
第二共同発明者	日付	Second inventor's signature	Date
住所	Residence		
国籍	Citizenship		
私書箱	Post Office Address		

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)